

LED Tanklighting/Floodlight Mireille

• GENERAL PROPERTIES

Lifespan	50.000 hour
Colour temperature	4.000 k
Luminous Flux	10.800 lumen
Beam angle	120°

• ELECTRICAL PROPERTIES

Power	120 Watt
Voltage	24V AC/42V AC/48V AC/110V DC 115V AC/230V AC
Plug	CEE/Schuko
Frequency	50Hz/60Hz

• PRODUCT INFORMATION

Article no. 42 Volt	180742120
Article no. 48 Volt	180748120
Article no. 110 Volt DC	180710120
Article no. 115 Volt	180715120
Article no. 230 Volt	1807230120
Product name	LED Tanklighting/Floodlight Mireille
Protection rate	IP44/IP65
Working environment	-30°C/50°C
Weight	8 Kg


• DIMENSIONS

Diameter	366 mm
Depth	155 mm

• TRIPOD (optional)

Height	0.6 - 1.2 m
Article no. tripod	11100091

LED Tanklighting/Floodlight Mireille is designed for use in environments where a high quality is a standard, such as Shipyards, industries and construction sites. During development process input of our users is incorporated in the design. We can therefore guarantee high operational reliability. LED Tanklighting/Floodlight Mireille is tested by various European institutes and laboratories with excellent results. It is possible to order the LED Tanklighting/Floodlight Mireille together with a tripod.

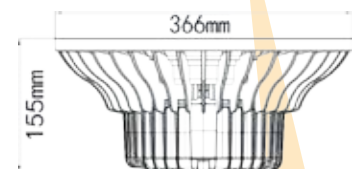

www.maxibel.nl

